



**Models with Proportional Pilot Relief Valve**

EFBG-03-125-<sup>C</sup><sub>H</sub>-17/1790

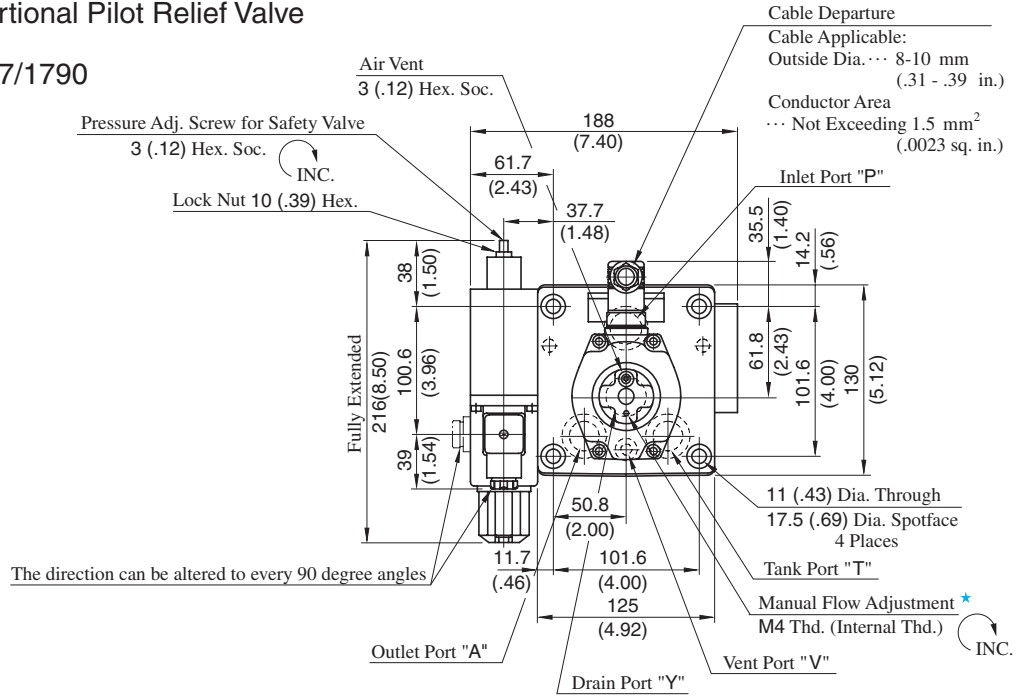

Cable Departure  
Cable Applicable:  
Outside Dia. ... 8-10 mm (.31 - .39 in.)  
Conductor Area ... Not Exceeding 1.5 mm<sup>2</sup> (.0023 sq. in.)

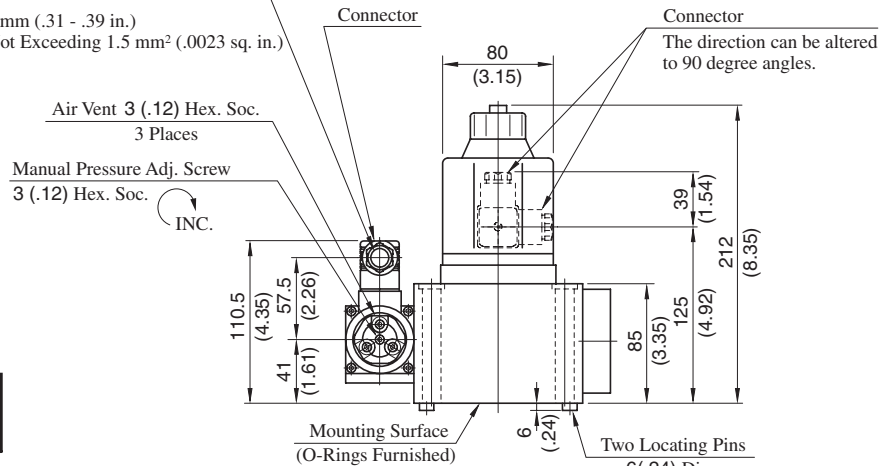


**DIMENSIONS IN  
MILLIMETRES (INCHES)**

★ Manual flow adjustment can be done by screwing for example an M4×20L screw in the M4 thread or pushing in a rod etc. there.

Approx. Mass ..... 16 kg  
(35.3 lbs.)

**Models without Proportional Pilot Relief Valve**

EFBG-03-125-17/1790

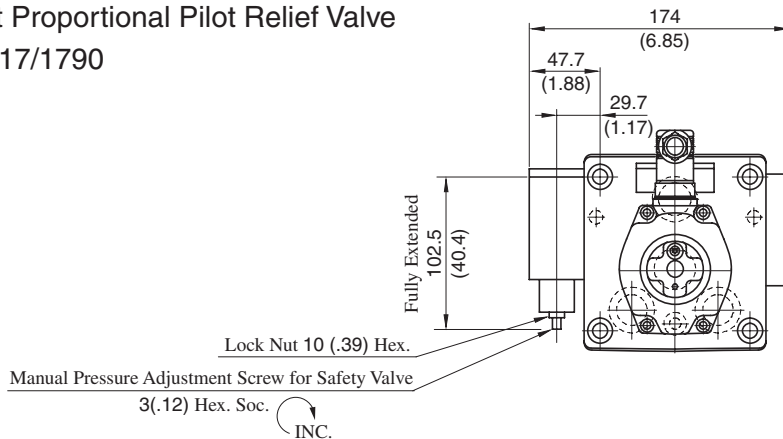

Approx. Mass ..... 14 kg  
(30.9 lbs.)

• For other dimensions, please refer to the models with proportional pilot relief valve.